


high temperature hose

HIGH TEMPERATURE HOSE (EURO HI-TEMP)

EURO HI-TEMP

EH PART NUMBER SYSTEM – EHT – (Dash Size) – S

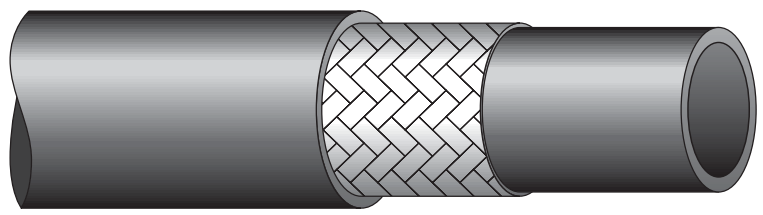

Construction

Liner: Synthetic oil and heat resistant rubber
 Reinforcement: Single high tensile steel wire braid
 Cover: Styrene Butadene Rubber (SBR)

Application

Medium pressure; high temperature hydraulic oil lines, truck engine, oil and fuel services.
 This hose has been specifically designed for high temperature compressor applications.
 For details please contact Europower Hydraulics Ltd., Technical Department.
 (Please specify pinpricked for compressor applications – i.e. EHT - [dash size] - EPP.)

Temperature Range

-40°F to +300°F (-40°C to +150°C).

Fittings

Europower 'U' series: 2-piece fittings

DIMENSIONS:

HOSE TYPE												
	NOMINAL I.D.		O.D.		MAX WORKING		MINIMUM		MINIMUM		WEIGHT	
	INCHES	MM	IN	MAX-MM	PSI	BAR	PSI	BAR	INCHES	MM	LB/FT	KG/M
EHT04S	1/4	6.4	0.555	14.1	2750	190	11000	760	3.5	95	0.168	0.25
EHT06S	3/8	9.5	0.713	18.1	2250	155	9000	620	4.5	110	0.242	0.36
EHT08S	1/2	12.7	0.846	21.5	2000	140	8000	560	6.5	160	0.302	0.45
EHT10S	5/8	15.9	0.972	24.7	1500	105	6000	420	7.0	180	0.349	0.52
EHT12S	3/4	19.1	1.126	28.6	1250	85	5000	340	8.5	220	0.437	0.65
EHT16S	1	25.4	1.441	36.6	1000	70	4000	280	11.0	275	0.612	0.91
EHT20S	1 1/4	31.8	1.764	44.8	625	45	2500	180	15.5	395	0.874	1.30
EHT24S	1 1/2	38.1	2.047	52.0	500	35	2000	140	19.0	485	1.142	1.70

