


MULTISPIRAL HOSE

EH PART NUMBER SYSTEM - R12T - (Dash size) - D

MEETS SAE 100 R12

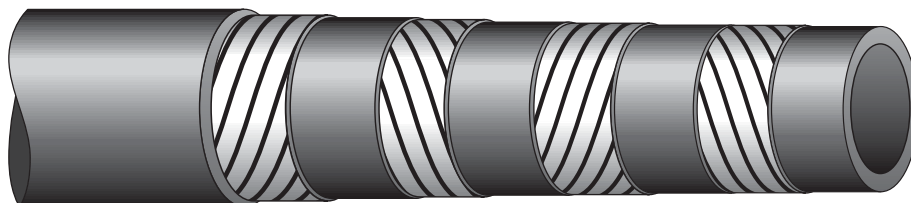

Construction

Liner: Oil resistant synthetic rubber
 Reinforcement: 4 plies of high tensile steel wire
 Cover: Grey synthetic rubber

Application

Pulsating pressure hydraulic applications
 This hose meets MSHA requirements of interim fire criteria
 MSHA approval number, IC-188

Temperature Range

-40°F to +210°F (-40°C to +100°C)

Fittings

Europower 'U' series 2-piece fittings

DIMENSIONS:

HOSE TYPE												
	NOMINAL I.D.		NOMINAL O.D.		MAX WORKING		MINIMUM		MINIMUM		WEIGHT	
	INCHES	MM	IN	MM	PSI	BAR	PSI	BAR	INCHES	MM	LB/FT	KG/M
R12T-06-D	3/8	9.5	0.795	20.2	4000	276	16000	1104	5.12	130	0.437	0.65
R12T-08-D	1/2	12.7	0.937	23.8	4000	276	16000	1104	7.09	180	0.538	0.80
R12T-10-D	5/8	15.9	1.090	27.7	4000	276	16000	1104	7.87	200	0.780	1.16
R12T-12-D	3/4	19.0	1.208	30.7	4000	276	16000	1104	9.45	240	0.853	1.27
R12T-16-D	1	25.4	1.496	38.0	4000	276	16000	1104	11.81	300	1.284	1.91
R12T-20-D	1 1/4	31.8	1.850	47.0	3000	207	12000	828	16.53	420	1.700	2.53

multispiral hose

